



LF-FMR040YSIII

FMR*YSIII non-SELV 1-driver with 4-output current | Constant Current - Non dimmable

LF-FMR040YSIII

FMR*YSIII non-SELV 1-driver with 4-output current | Constant Current - Non dimmable



Product family features

- Low THD<15%@full load
- Rated input voltage: 220-240Vac
- Ta: -30°C~+60°C
- Ripple current<5%
- Suitable for Class I light fixtures
- 5 years guarantee



Product family benefits

- Output current adjustable via DIP switch in 4 shifts
- Super high efficiency
- Linear metal casing with 21mm housing height
- Long lifetime and high reliability
- Flicker free
- Non-SELV output

Typical applications

- For linear light and tri-proof light
- For office, commercial, decorative and retail lighting

Product parameters

- | | |
|------------------------------------|----------------------------|
| — Output current 200/250/300/350mA | — Output voltage 40-130Vdc |
| — Output power 9-40W | — Efficiency 91% |
| — Input voltage 198-264Vac | |

Electrical data

Input data

Rated supply voltage	220 ... 240V
AC voltage range	198 ... 264V
Mains frequency	0/50/60Hz
Input voltage DC	180 ... 264V ¹⁾
Power factor	≥0.95
Efficiency in max. power	91% ²⁾
THD	≤15%
Input current	0.30A Max
Inrush current	32A ³⁾
Loading no. on circuit breaker 10 A (B)	13
Loading no. on circuit breaker 10 A (C)	21
Loading no. on circuit breaker 16 A (B)	21
Loading no. on circuit breaker 16 A (C)	35
Loading no. on circuit breaker 20 A (C)	43
Loading no. on circuit breaker 20 A (C)	54
Protective conductor current	≤0.7mA

Output data

Nominal output voltage	40... 130V ⁴⁾
Nominal output current	200/250/300/350mA ⁵⁾
Default output current	350mA
Current set	DIP switch (please see the DIP switch definition)
Maximum output power	40W
Nominal output power	9... 40W
Output ripple current (100 Hz)	<5%
Flicker	Comply with IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Output current tolerance	±5%
Temperature tolerance	±10%
Starting time	<0.5S

Safety

Withstanding voltage	I/P-PG: 1.6kV&5mA&60S;
Surge capability (L-N)	1kV
Surge capability (L/N-Ground)	2kV
Insulation resistance	I/P-PG O/P-PG: >100MΩ@500VDC
Guarantee	5 years ⁶⁾

1) DC input is only for emergency

2) @full load

3) t =190μs


4) Please refer to the operating window about the relationship between output voltage and output current.

5) Fixed current version optional


6) 5 years @Tc≤ 81°C

Characteristic diagram


Operating Window

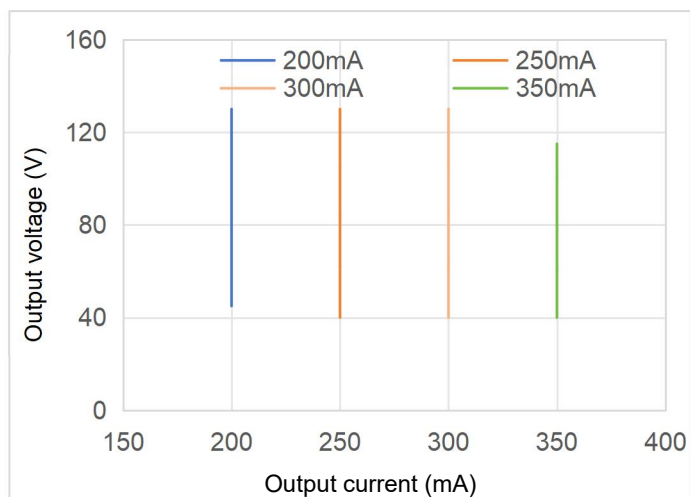


Typical Efficiency vs Load

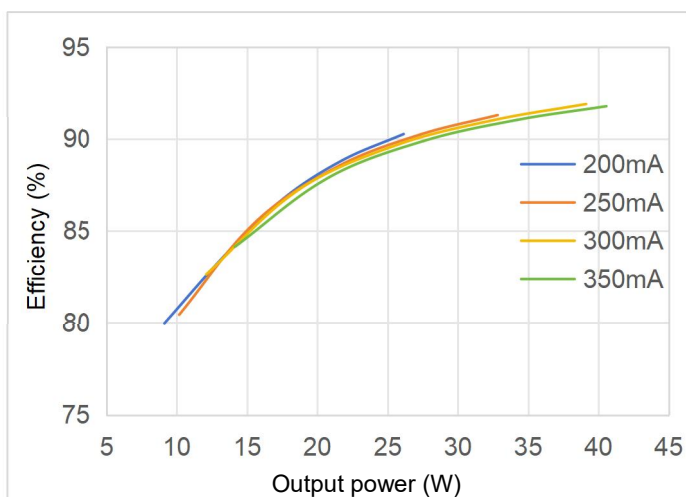


Typical Power Factor vs Load

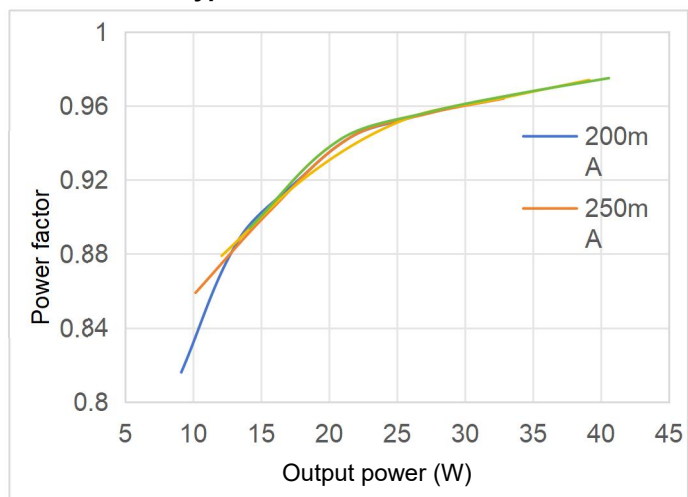


Typical THD vs Load

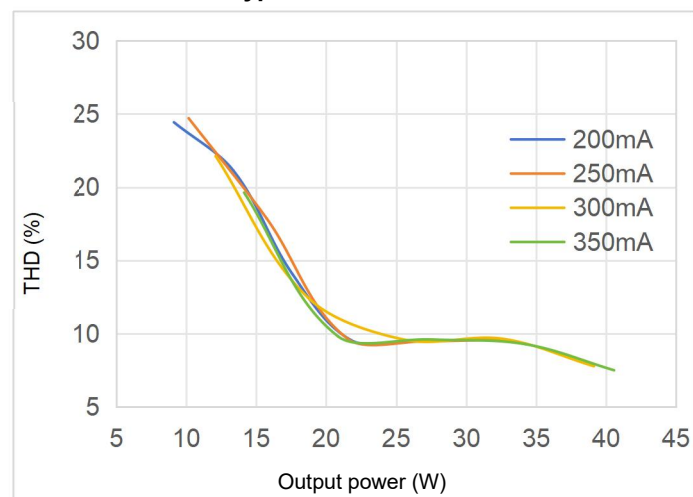

Lifespan

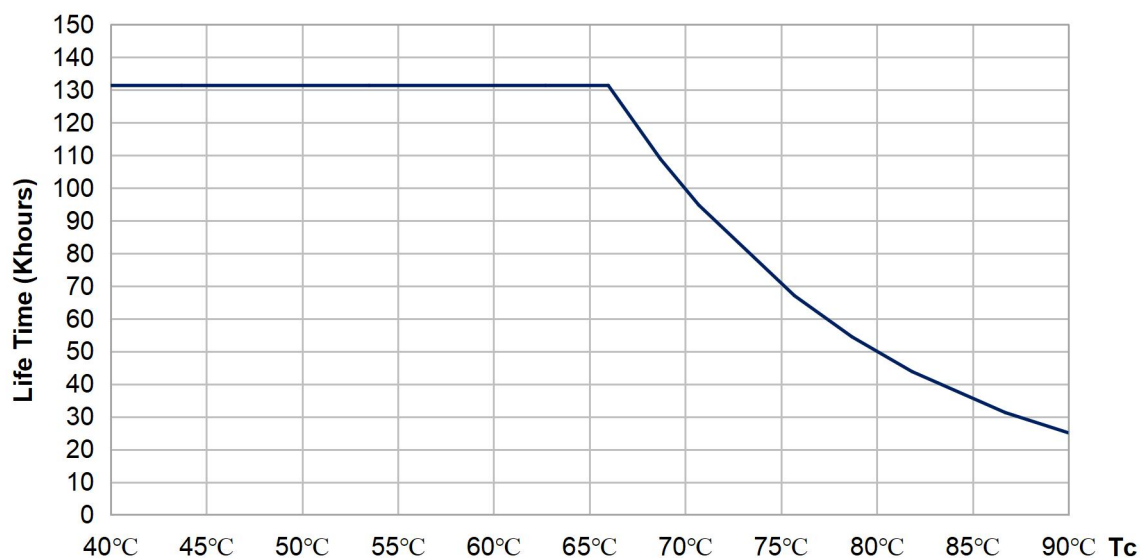

Dimensions

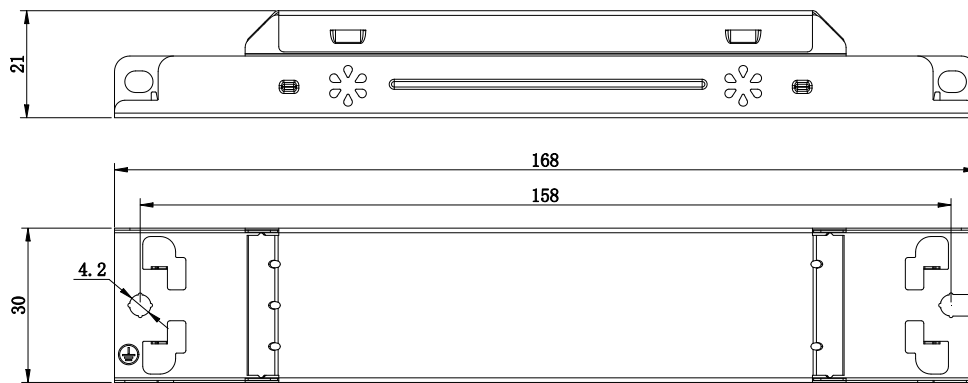

Mounting hole spacing, length	158.0mm
Mounting hole diameter	4.2mm
Product weight	110.0g
Cable cross-section, input side	0.5 ... 1.5 mm ²
Cable cross-section, output side	0.5 ... 1.5 mm ²
Wire preparation length, input side	7 ... 8mm
Wire preparation length, output side	7 ... 8mm
Length	168.0mm
Width	30.0mm
Height	21.0mm


Colors & materials

Casing material	Color coated galvanized sheet
Casing color	White

Temperature & operating conditions

Ambient temperature range	-30°C - +60°C
Maximum temperature at Tc test point	85°C
Temperature range at storage	-30°C - +80°C (6 months in Class I environment)
Humidity range at storage	20-95%RH(no condensation)
Humidity during operation	20-90%RH(no condensation)
RoHS	RoHS 2.0 (EU) 2015/863

Tc test point

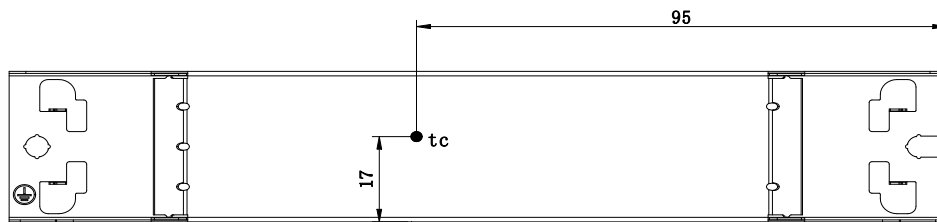

Note: this diagram is the front view and Tc point is on the front side of the driver.

Product Terminal

Input		Output	
AC-L	AC live wire input	LED+	Positive electrode output of LED driver
AC-N	AC neutral wire input	LED-	Negative electrode output of LED driver
	Earth wire		

DIP switch Terminal

Output current	Output voltage	DIP switch 1	DIP switch 2
200mA	40-130Vdc	-	-
250mA	40-130Vdc	-	ON
300mA	40-130Vdc	ON	-
*350mA	40-115Vdc	ON	ON

Note: "-": shift OFF. "*": default current. DIP when power on is NOT allowed. Please disconnect the AC power before DIP.

Capabilities

Dimmable	-
Over heating protection	-
Overload protection	-
Short-circuit protection	Automatic reversible
No-load protection	<200V
Suitable for fixtures with prot. class	I
Control interface	-
Number of channels	1 channel

Programming

Programmer	-
DALI Control Software	-
APP	-

Certificates & standards

Approval marks	ENEC, UKCA, CE, CB, EL, RCM, SAA, EAC, CCC
Standards	GB 19510.1-2009, GB 19510.14-2009 IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384 IEC/EN 61347-2-13 Annex J AS 61347.1, AS 61347.2.13 TP TC 004/2011+TP TC 020/2011
EMC	GB 17625.1-2022, GB/T 17743-2021 EN 55015, EN 61547, EN 61000-3-2,3
Type of protection	IP20

Logistical Data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-FMR040YSIII	84	385mm*285mm*210mm	23.04 dm ³	9.85kg±5%

Test equipment & condition

Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
-----------------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. Configure the quantity of circuit breakers based on inrush current and time.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.



LF-FMR060YSIII

FMR*YSIII non-SELV 1-driver with 4-output current | Constant Current - Non dimmable

LF-FMR060YSIII

FMR*YSIII non-SELV 1-driver with 4-output current | Constant Current - Non dimmable



Product family features

- Low THD<15%@full load
- Rated input voltage: 220-240Vac
- Ta: -30°C~+60°C
- Ripple current<5%
- Suitable for Class I light fixtures
- 5 years guarantee



Product family benefits

- Output current adjustable via DIP switch in 4 shifts
- Super high efficiency
- Linear metal casing with 21mm housing height
- Long lifetime and high reliability
- Flicker free
- Non-SELV output

Typical applications

- For linear light and tri-proof light
- For office, commercial, decorative and retail lighting

Product parameters

- | | |
|------------------------------------|----------------------------|
| — Output current 200/250/300/350mA | — Output voltage 80-200Vdc |
| — Output power 16-60W | — Efficiency 92.5% |
| — Input voltage 198-264Vac | |

Electrical data

Input data

Rated supply voltage	220 ... 240V
AC voltage range	198 ... 264V
Mains frequency	0/50/60Hz
Input voltage DC	180 ... 264V ¹⁾
Power factor	≥0.96
Efficiency in max. power	92.5% ²⁾
THD	≤15%
Input current	0.40A Max
Inrush current	45A ³⁾
Loading no. on circuit breaker 10 A (B)	10
Loading no. on circuit breaker 10 A (C)	17
Loading no. on circuit breaker 16 A (B)	17
Loading no. on circuit breaker 16 A (C)	27
Loading no. on circuit breaker 20 A (C)	33
Loading no. on circuit breaker 20 A (C)	42
Protective conductor current	≤0.7mA

Output data

Nominal output voltage	80... 200V ⁴⁾
Nominal output current	200/250/300/350mA ⁵⁾
Default output current	350mA
Current set	DIP switch (please see the DIP switch definition)
Maximum output power	60W
Nominal output power	16... 60W
Output ripple current (100 Hz)	<5%
Flicker	Comply with IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Output current tolerance	±5%
Temperature tolerance	±10%
Starting time	<0.5S

Safety

Withstanding voltage	I/P-PG: 1.6kV&5mA&60S;
Surge capability (L-N)	1kV
Surge capability (L/N-Ground)	2kV
Insulation resistance	I/P-PG O/P-PG: >100MΩ@500VDC
Guarantee	5 years ⁶⁾

1) DC input is only for emergency

2) @full load

3) t =200μs


4) Please refer to the operating window about the relationship between output voltage and output current.

5) Fixed current version optional


6) 5 years @T_c≤ 84°C

Characteristic diagram


Operating Window

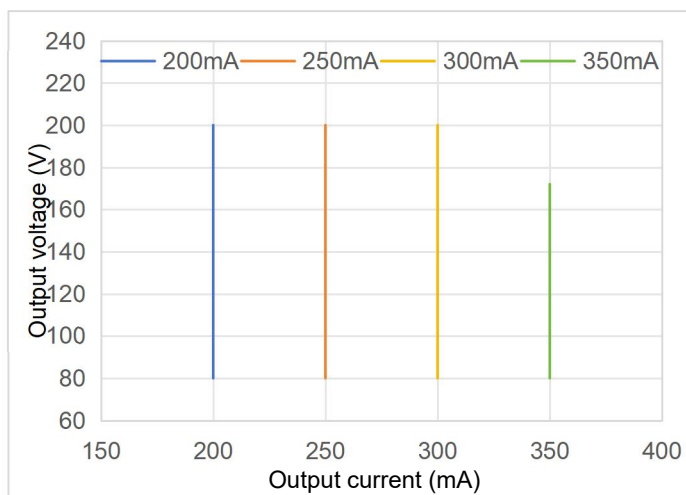


Typical Efficiency vs Load

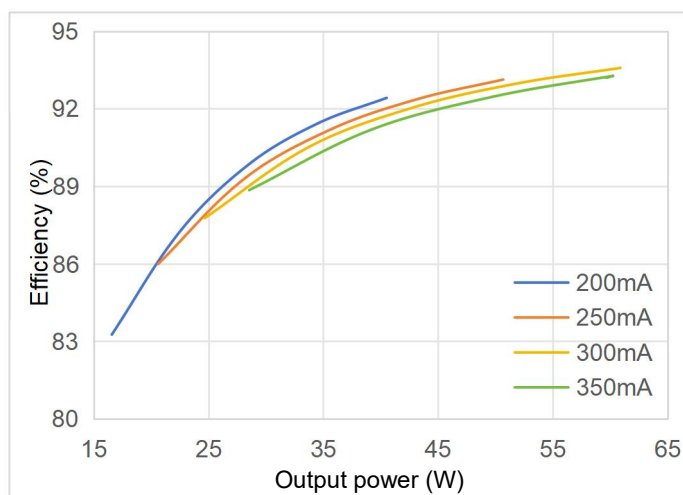


Typical Power Factor vs Load

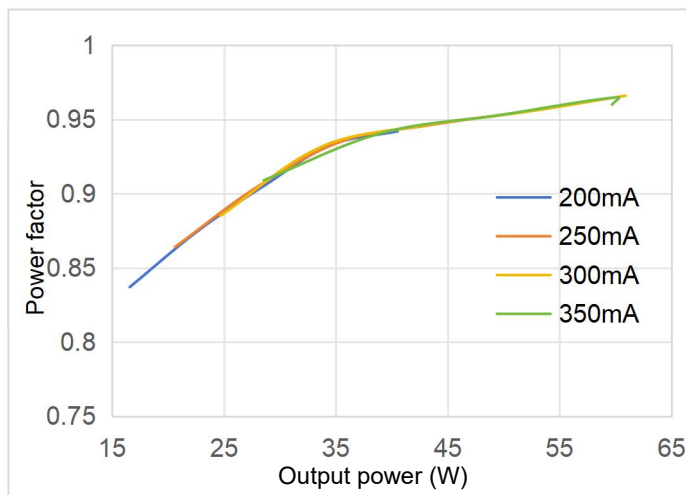


Typical THD vs Load

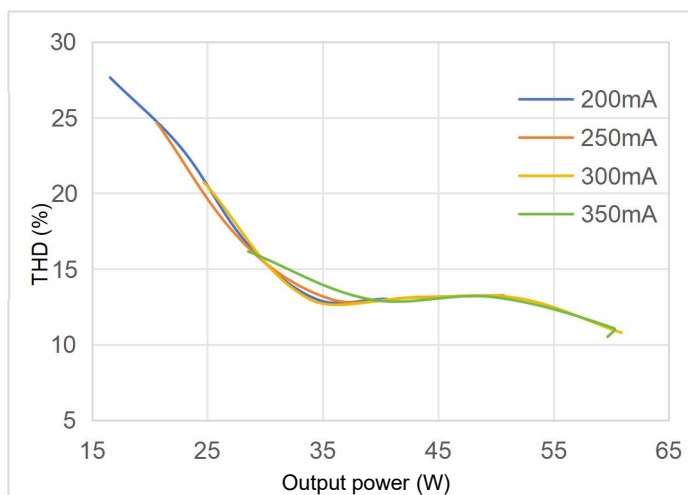

Lifespan

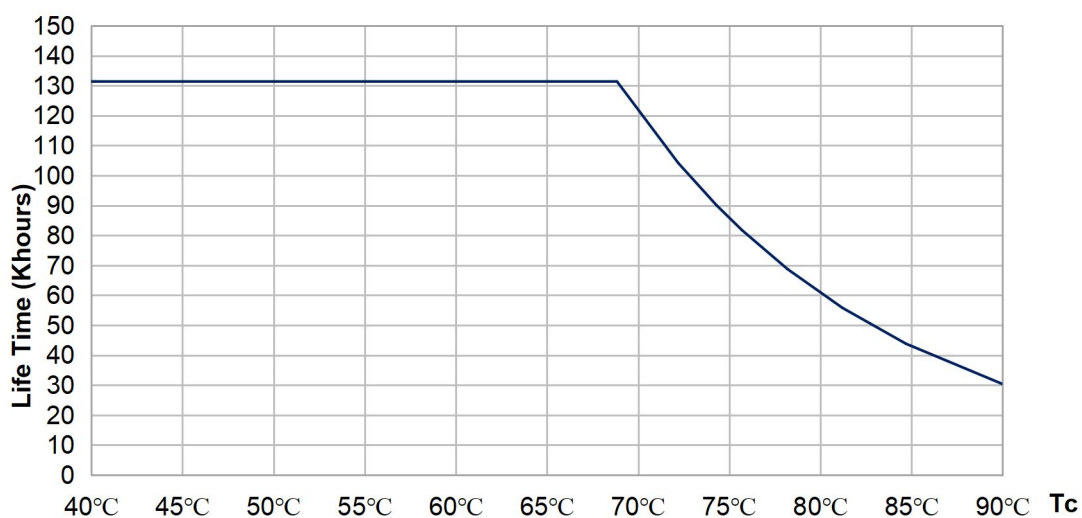

Dimensions

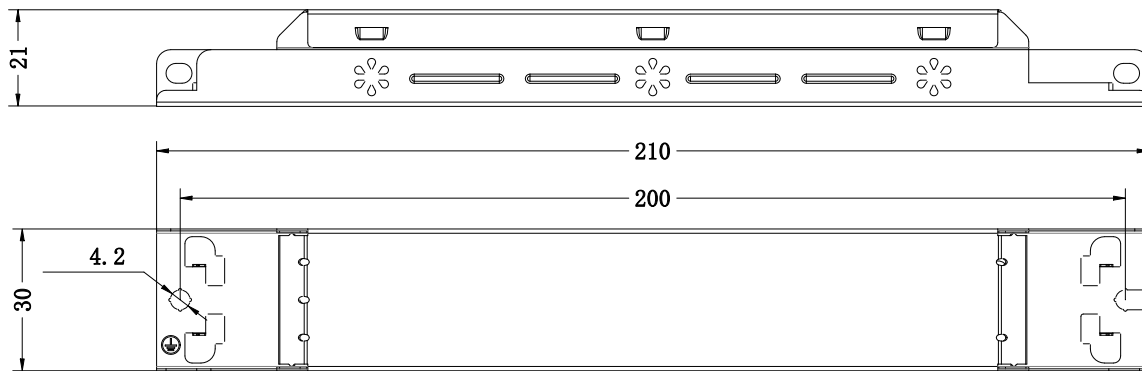

Mounting hole spacing, length	200.0mm
Mounting hole diameter	4.2mm
Product weight	137.0g
Cable cross-section, input side	0.5 ... 1.5 mm ²
Cable cross-section, output side	0.5 ... 1.5 mm ²
Wire preparation length, input side	7 ... 8mm
Wire preparation length, output side	7 ... 8mm
Length	210.0mm
Width	30.0mm
Height	21.0mm


Colors & materials

Casing material	Color coated galvanized sheet
Casing color	White

Temperature & operating conditions

Ambient temperature range	-30°C - +60°C
Maximum temperature at Tc test point	90°C
Temperature range at storage	-30°C - +80°C (6 months in Class I environment)
Humidity range at storage	20-95%RH(no condensation)
Humidity during operation	20-90%RH(no condensation)
RoHS	RoHS 2.0 (EU) 2015/863

Tc test point

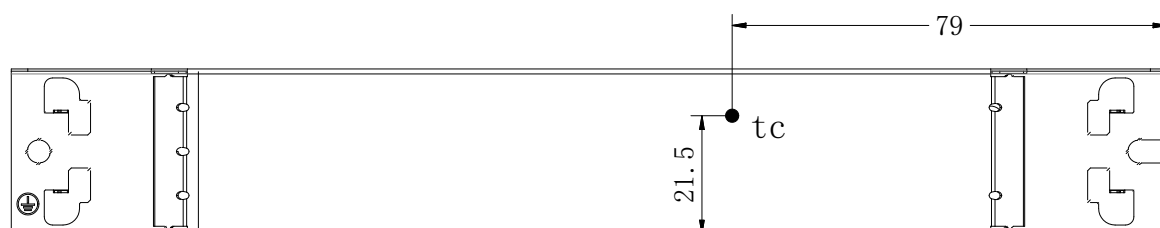

Note: this diagram is the front view and Tc point is on the front side of the driver.

Product Terminal

Input		Output	
AC-L	AC live wire input	LED+	Positive electrode output of LED driver
AC-N	AC neutral wire input	LED-	Negative electrode output of LED driver
	Earth wire		

DIP switch Terminal

Output current	Output voltage	DIP switch 1	DIP switch 2
200mA	80-200Vdc	-	-
250mA	80-200Vdc	-	ON
300mA	80-200Vdc	ON	-
*350mA	80-172Vdc	ON	ON

Note: "-": shift OFF. "*": default current. DIP when power on is NOT allowed. Please disconnect the AC power before DIP.

Capabilities

Dimmable	-
Over heating protection	-
Overload protection	-
Short-circuit protection	Automatic reversible
No-load protection	<250V
Suitable for fixtures with prot. class	I
Control interface	-
Number of channels	1 channel

Programming

Programmer	-
DALI Control Software	-
APP	-

Certificates & standards

Approval marks	ENEC, UKCA, CE, CB, EL, RCM, SAA, EAC, CCC
Standards	GB 19510.1-2009, GB 19510.14-2009 IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384 IEC/EN 61347-2-13 Annex J AS 61347.1, AS 61347.2.13 TP TC 004/2011+TP TC 020/2011
EMC	GB 17625.1-2022, GB/T 17743-2021 EN 55015, EN 61547, EN 61000-3-2,3
Type of protection	IP20

Logistical Data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-FMR060YSIII	63	385mm*285mm*210mm	23.04 dm ³	9.21kg±5%

Test equipment & condition

Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
-----------------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. Configure the quantity of circuit breakers based on inrush current and time.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.



LF-FMR080YSIII

FMR*YSIII non-SELV 1-driver with 8-output current | Constant Current - Non dimmable

LF-FMR080YSIII

FMR*YSIII non-SELV 1-driver with 8-output current | Constant Current - Non dimmable



Product family features

- Low THD<15%@full load
- Rated input voltage: 220-240Vac
- Ta: -30°C~+60°C
- Ripple current<5%
- Suitable for Class I light fixtures
- 5 years guarantee



Product family benefits

- Output current adjustable via DIP switch in 8 shifts
- Super high efficiency
- Linear metal casing with 21mm housing height
- Long lifetime and high reliability
- Flicker free
- Non-SELV output

Typical applications

- For linear light and tri-proof light
- For office, commercial, decorative and retail lighting

Product parameters

- Output current 200/250/300/350/400/450/500/550mA
- Output power 11-80W
- Input voltage 198-264Vac
- Output voltage 54-230Vdc
- Efficiency 94%

Electrical data

Input data

Rated supply voltage	220 ... 240V
AC voltage range	198 ... 264V
Mains frequency	0/50/60Hz
Input voltage DC	180 ... 264V ¹⁾
Power factor	≥0.98
Efficiency in max. power	94% ²⁾
THD	≤15%
Input current	0.55A Max
Inrush current	45A ³⁾
Loading no. on circuit breaker 10 A (B)	13
Loading no. on circuit breaker 10 A (C)	21
Loading no. on circuit breaker 16 A (B)	21
Loading no. on circuit breaker 16 A (C)	35
Loading no. on circuit breaker 20 A (C)	43
Loading no. on circuit breaker 20 A (C)	54
Protective conductor current	≤0.7mA

Output data

Nominal output voltage	54... 230V ⁴⁾
Nominal output current	200/250/300/350/400/450/500/550mA ⁵⁾
Default output current	550mA
Current set	DIP switch (please see the DIP switch definition)
Maximum output power	80W
Nominal output power	11... 80W
Output ripple current (100 Hz)	<5%
Flicker	Comply with IEEE Std 1789-2015
CIE SVM	≤0.4
IEC-Pst	≤1
Output current tolerance	±5%
Temperature tolerance	±10%
Starting time	<0.5S

Safety

Withstanding voltage	I/P-PG: 1.6kV&5mA&60S;
Surge capability (L-N)	1kV
Surge capability (L/N-Ground)	2kV
Insulation resistance	I/P-PG O/P-PG: >100MΩ@500VDC
Guarantee	5 years ⁶⁾

1) DC input is only for emergency

2) @350mA/230V

3) t =180μs


4) Please refer to the operating window about the relationship between output voltage and output current.

5) Fixed current version optional


6) 5 years @T_c≤ 83°C

Characteristic diagram


Operating Window

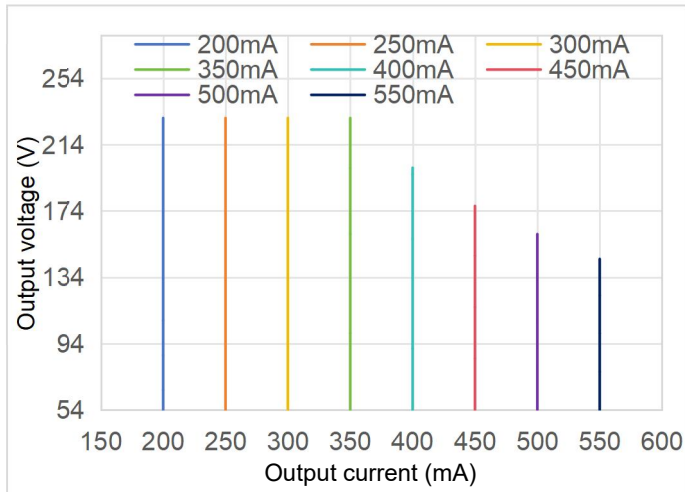


Typical Efficiency vs Load

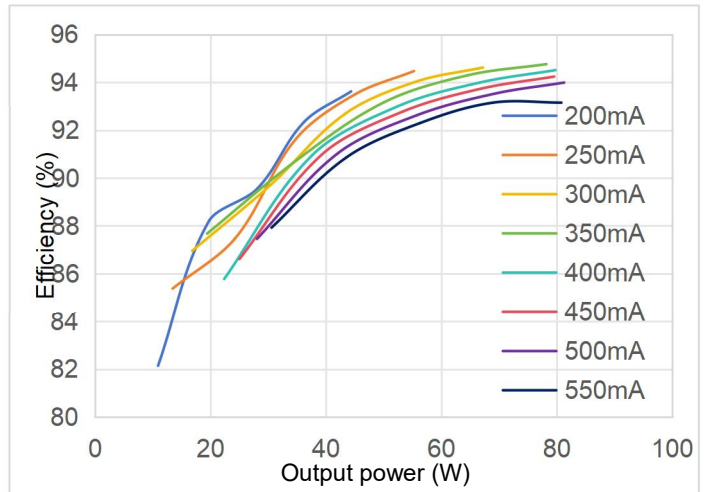


Typical Power Factor vs Load

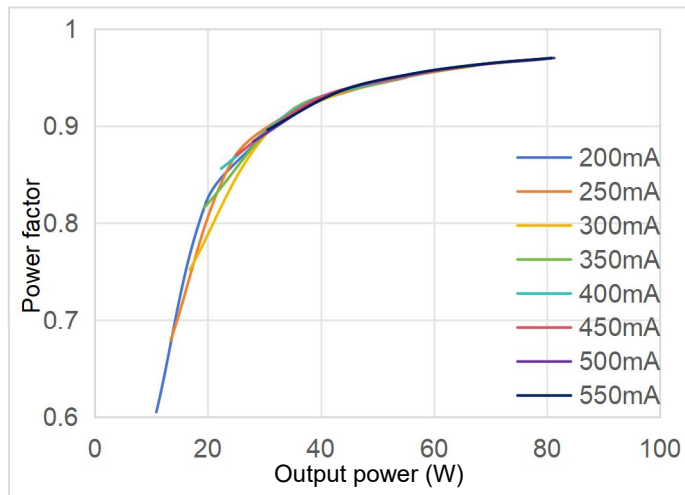


Typical THD vs Load

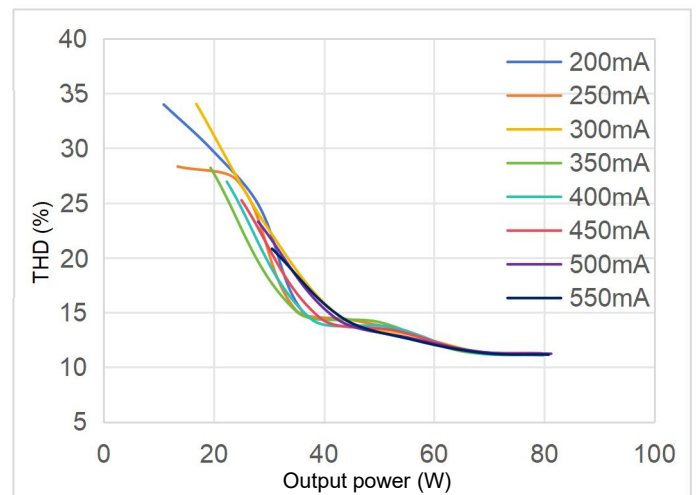

Lifespan

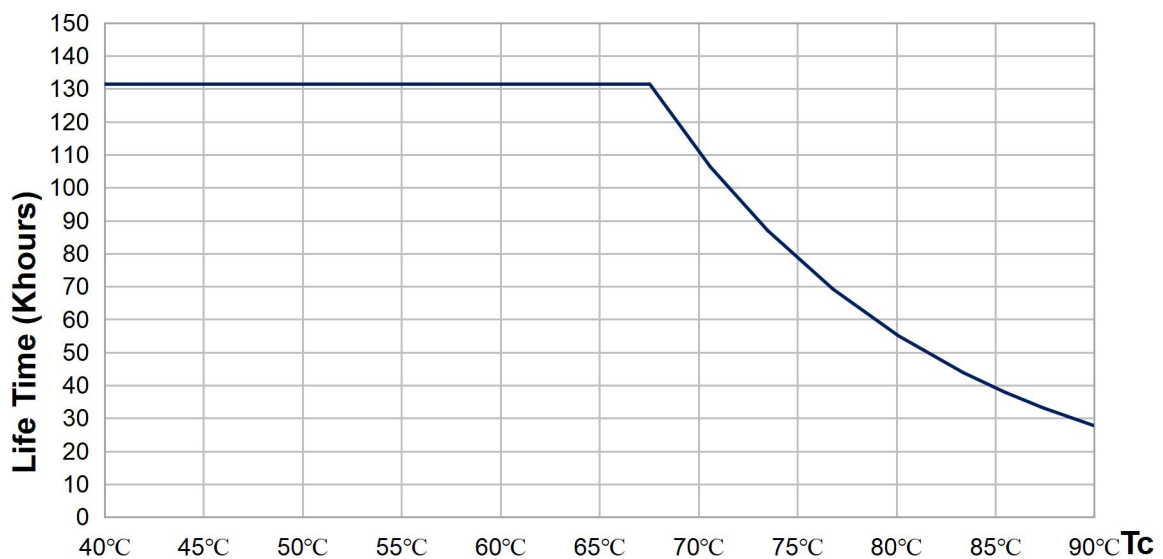

Dimensions

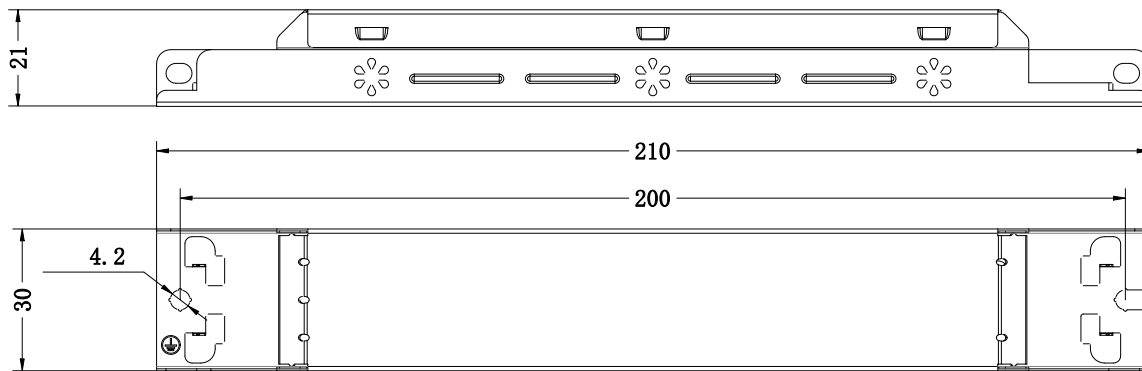

Mounting hole spacing, length	200.0mm
Mounting hole diameter	4.2mm
Product weight	150.0g
Cable cross-section, input side	0.5 ... 1.5 mm ²
Cable cross-section, output side	0.5 ... 1.5 mm ²
Wire preparation length, input side	7 ... 8mm
Wire preparation length, output side	7 ... 8mm
Length	210.0mm
Width	30.0mm
Height	21.0mm


Colors & materials

Casing material	Color coated galvanized sheet
Casing color	White

Temperature & operating conditions

Ambient temperature range	-30°C - +60°C
Maximum temperature at Tc test point	90°C
Temperature range at storage	-30°C - +80°C (6 months in Class I environment)
Humidity range at storage	20-95%RH(no condensation)
Humidity during operation	20-90%RH(no condensation)
RoHS	RoHS 2.0 (EU) 2015/863

Tc test point

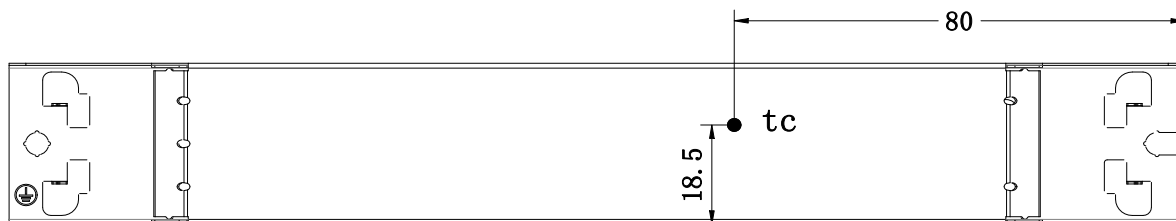

Note: this diagram is the front view and Tc point is on the front side of the driver.

Product Terminal

Input		Output	
AC-L	AC live wire input	LED+	Positive electrode output of LED driver
AC-N	AC neutral wire input	LED-	Negative electrode output of LED driver
	Earth wire		

DIP switch Terminal

Output current	Output voltage	DIP switch 1	DIP switch 2	DIP switch 3
200mA	54-230Vdc	-	-	-
250mA	54-230Vdc	-	-	ON
300mA	54-230Vdc	-	ON	-
350mA	54-230Vdc	-	ON	ON
400mA	54-200Vdc	ON	-	-
450mA	54-177Vdc	ON	-	ON
500mA	54-160Vdc	ON	ON	-
* 550mA	54-145Vdc	ON	ON	ON

Note: "-": shift OFF. "**": default current. DIP when power on is NOT allowed. Please disconnect the AC power before DIP.

Capabilities

Dimmable	-
Over heating protection	-
Overload protection	-
Short-circuit protection	Automatic reversible
No-load protection	<250V
Suitable for fixtures with prot. class	I
Control interface	-
Number of channels	1 channel

Programming

Programmer	-
DALI Control Software	-
APP	-

Certificates & standards

Approval marks	ENEC, UKCA, CE, CB, EL, RCM, SAA, EAC, CCC
Standards	GB 19510.1-2009, GB 19510.14-2009 IEC/EN 61347-2-13, IEC/EN 61347-1, IEC/EN 62493 IEC/EN 62384 IEC/EN 61347-2-13 Annex J AS 61347.1, AS 61347.2.13 TP TC 004/2011+TP TC 020/2011
EMC	GB 17625.1-2022, GB/T 17743-2021 EN 55015, EN 61547, EN 61000-3-2,3
Type of protection	IP20

Logistical Data

Product	Packaging unit (Pieces/Unit)	Dimensions (L*W*H)	Volume	Gross weight
LF-FMR080YSIII	63	385mm*285mm*210mm	23.04 dm ³	10.02kg±5%

Test equipment & condition

Test Equipment	AC power source: CHROMA6530, digital power meter: CHROMA66205, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.
-----------------------	---

If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.

Additional information

1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.
2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.
3. Configure the quantity of circuit breakers based on inrush current and time.
4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.

Transportation & storage

Suitable transportation means: vehicles, boats and aeroplanes.

In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.

Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.

Man-made damage is beyond the scope of Lifud warranty service.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.