


JL-208-IP66

Shorting Cap



Product Summary

- Short a twist-lock photocontrol receptacle while under maintenance
- Applicable with both ANSI C136.10 & C136.41
- IP66 protection while installed
- UV stabilized Polycarbonate enclosure
- High impact Polybutylene Terephthalate base
- Easy-to-handle Twist-bar Enclosure

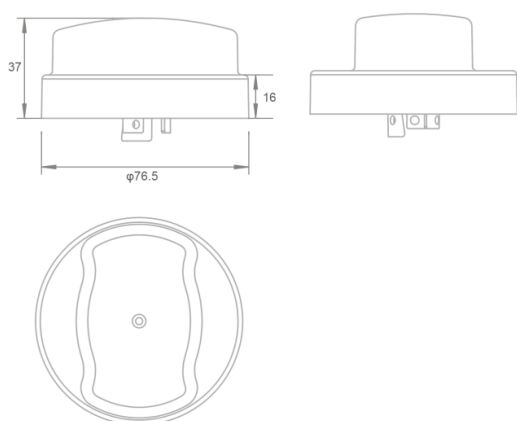

Specifications

Model No.	JL-208-IP66
Rated Loading	7200W Tungsten, 7200VA Ballast
Maximum Voltage	0~480VAC
Rated Frequency	50/60Hz
Ambient Temperature	-40°C ~ +70°C
Related Humidity	96%
Shell material	PC
IP level	IP66
Certifications	    

Installation

Disconnect power; wire the receptacle according to the diagram below. Push the Shorting Cap on and twist it clockwise to lock it into the receptacle.

