REDMADE®

LightMAX

High power IP67 relamping kit

APPLICATIONS

Area

Industrial

Landscape

Street

High power IP67 relamping kit

Main Features

IP67 relamping kit *is the top-efficiency LED solution for outdoor lighting.*
The ecosystem is based on the made-in-Italy LED modules of the LightMAX series and it is available in all CCT options from 1800K to 6500K and CRI 70, 80 and 90. The kit is completed by selected and certified components from the main brands in the market.

Designed to optimally replace inefficient old sources in existing luminaires, IP67 relamping kit is suitable for any type of structure and allows traditional light fixture to be preserved by adapting them to modern LED technologies.

Il **kit relamping IP67** è la soluzione di illuminazione LED ad alta efficienza per applicazioni outdoor. L'ecosistema è basato sui moduli LED della serie LightMAX, realizzati in Italia, ed è disponibile in tutte le opzioni di CCT da 1800K a 6500K e con CRI 70, 80 e 90. Il kit è completato da componenti selezionati e certificati dei maggiori brand sul mercato.

Progettato per sostituire in maniera ottimale vecchie sorgenti inefficienti in apparecchi già installati, il kit relamping IP67 è In grado di adattarsi a ogni tipo di struttura e permette di conservare i corpi illuminanti tradizionali adattandoli alla moderne tecnologie a LED.

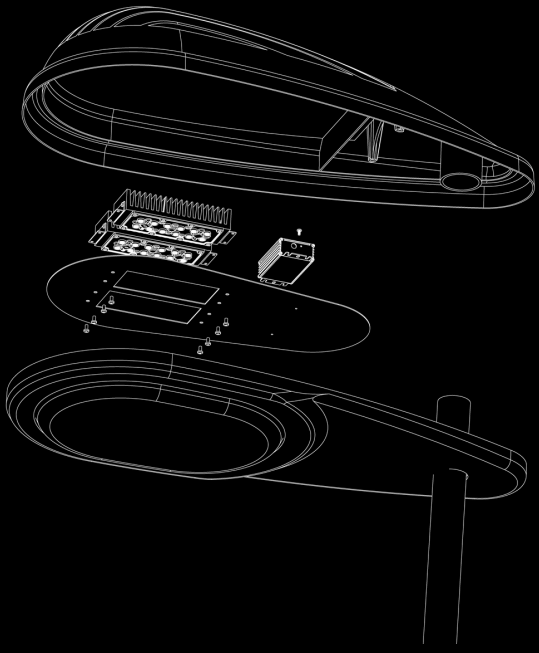

ACCESSORIES

Optics

Thermal Pad

Heatsink


Power Supply


Socket

2×2 power LED module | R0C24

DATASHEET

Kit dimensions (LxWxH): 100x100x40mm

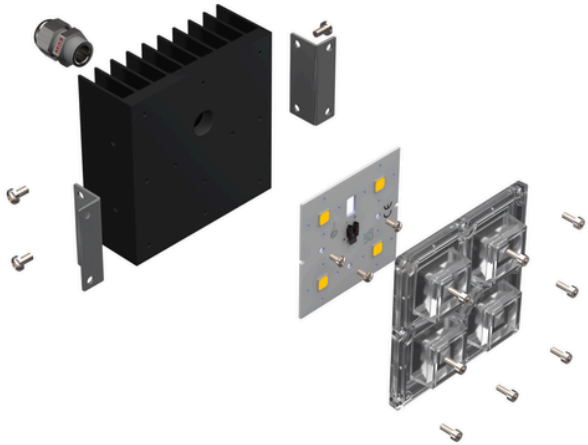

CCT	CRI	Driver Current [mA]	Flux@ Tj= 75°C (Source)	Lm/W@ Tj=75°C (Source)	Lm/W System*	Power [W]
4000K	70	350	780	205	>174	3,8
		700	1530	196	>163	7,8
		1050	2220	183	>154	12,1
		1400	2865	172	>146	16,7

*including driver and optics | cable on request

S2P2

PHOTOMETRIC FEATURES

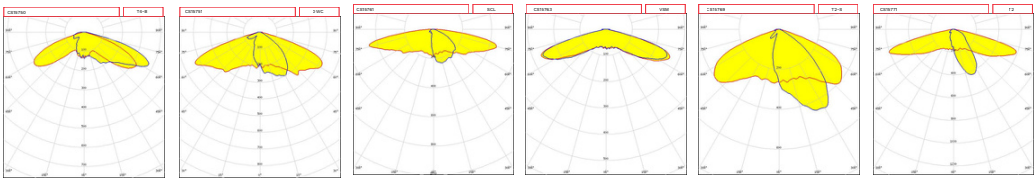

2×6 power LED module | R0344

DATASHEET

Kit dimensions (LxWxH): 200x70x40mm

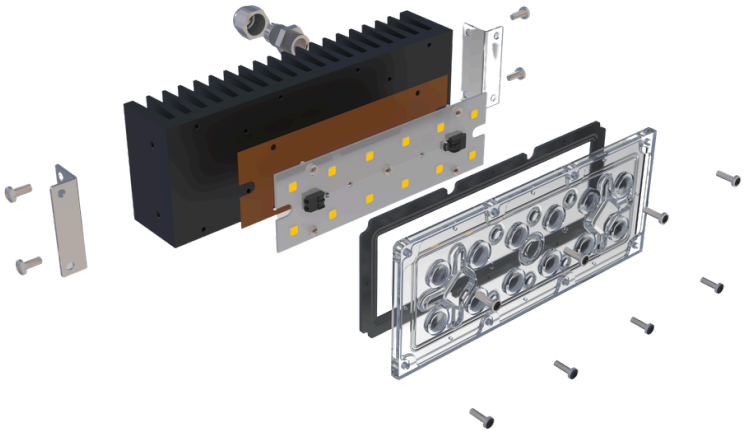

CCT	CRI	Driver Current [mA]	Flux@ Tj= 75°C (Source)	Lm/W@ Tj=75°C (Source)	Lm/W System*	Power [W]
4000K	70	350	2333	206	>175	11,3
		700	4591	195	>165	23,5
		1050	6661	183	>155	36,4
		1400	8592	172	>146	50

*including driver and optics | cable on request

PHOTOMETRIC FEATURES

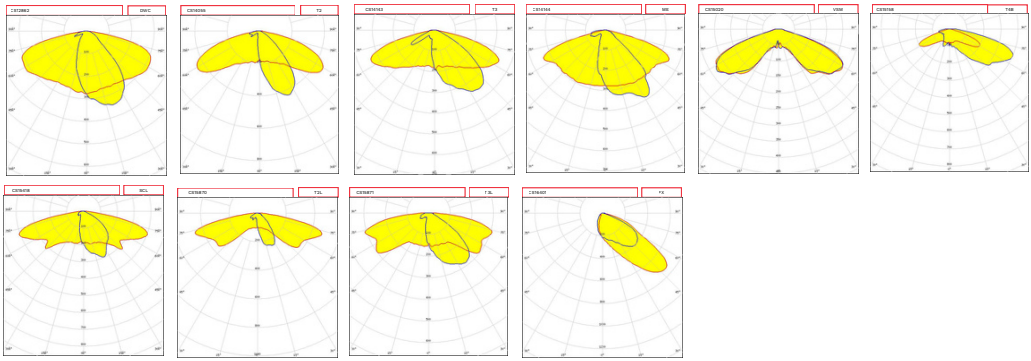

symmetrical emissions on request | emissioni simmetriche su richiesta

24 power LED module | R0B44

DATASHEET

Kit dimensions (LxWxH): 200x70x40mm

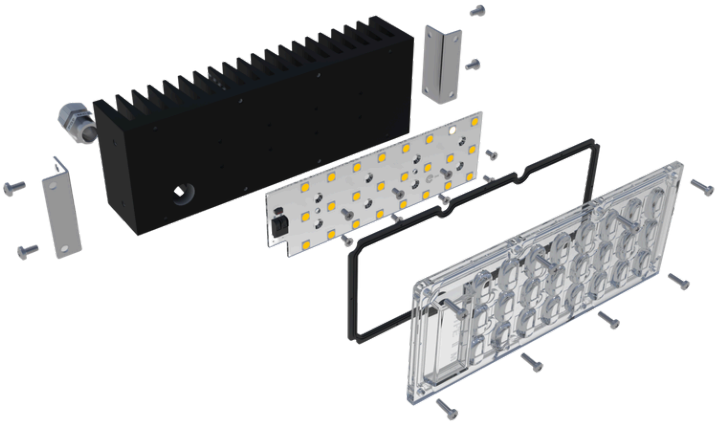

CCT	CRI	Driver Current [mA]	Flux@ Tj= 75°C (Source)	Lm/W@ Tj=75°C (Source)	Lm/W System*	Power [W]
4000K	70	350	4665	207	>175	22,5
		700	9182	195	>165	47
		1050	13322	183	>155	72,8
		1400	17184	172	>146	100,1

*including driver and optics | cable on request

PHOTOMETRIC FEATURES

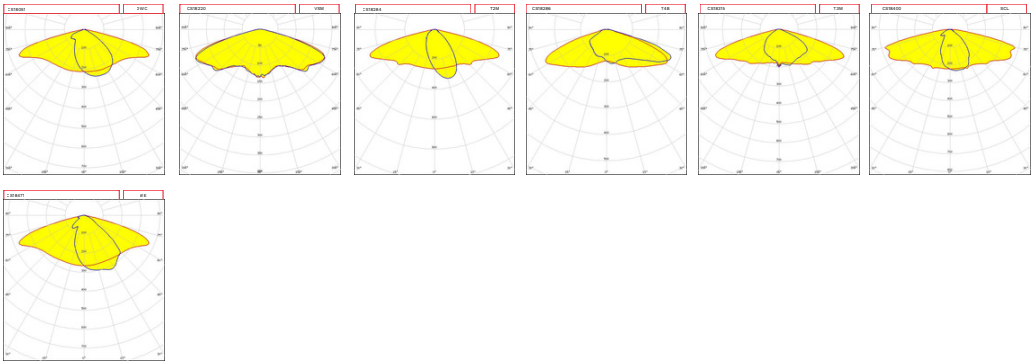

symmetrical emissions on request | emissioni simmetriche su richiesta

REDMADE®

LightMAX

High power IP67 relamping kit

IP67 relamping kit *guarantees an excellent luminous flux and the maximum system reliability:* ***LED module*** *from 12W to 50W****,*** ***optics*** *with IP67 waterproof gasket, anodized aluminum* ***heat sink*** *and ENEC certified* ***LED driver.***

Il **kit relamping IP67** garantisce un ottimo flusso luminoso e la massima affidabilità del sistema: **modulo LED** da 12W a 50W, **ottiche** con guarnizione waterproof IP67, **dissipatore** in alluminio anodizzato e **alimentatore** certificato ENEC.

UNIVERSAL SCIENCE SRL

Sole-shareholder company

+39.02.94324511

sales@redmade.it

www.redmade.it

Via Adige, 30 - 20006
Pregnana Milanese (MI) - Italy